

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 244 335 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
25.09.2002 Bulletin 2002/39

(51) Int Cl.7: **H05B 33/14, H05B 33/10**

(21) Application number: **02006003.4**

(22) Date of filing: **15.03.2002**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

- **Kawasumi, Akito**
Neyagawa-shi, Osaka 572-0055 (JP)
- **Okuma, Shinji**
Obama-shi, Fukui 917-0027 (JP)
- **Chikahisa, Yosuke**
Akashi-shi, Hyogo 674-0068 (JP)
- **Nishioka, Naohiro**
Hirakata-shi, Osaka 573-0081 (JP)

(30) Priority: 19.03.2001 JP 2001077863
01.10.2001 JP 2001305035
05.12.2001 JP 2001371250

(71) Applicant: **MATSUSHITA ELECTRIC INDUSTRIAL
CO., LTD.**
Kadoma-shi, Osaka 571-8501 (JP)

(74) Representative: **Grünecker, Kinkeldey,
Stockmair & Schwanhäusser Anwaltssozietät**
Maximilianstrasse 58
80538 München (DE)


(72) Inventors:
• **Tanabe, Koji**
Katano-shi, Osaka 576-0051 (JP)

(54) Electroluminescent lamp and method for manufacturing the same

(57) An electroluminescent lamp (EL lamp) is formed by stacking a light-transmitting electrode-layer, an adhesive synthetic resin layer, a luminescent layer formed of the synthetic resin layer with phosphor particles fixed uniformly, a dielectric layer and a back electrode-layer on a transparent substrate sequentially. By this structure, a uniform EL lamp having improved brightness can be produced. A method for manufactur-

ing the EL lamp includes following steps for fixing the phosphor particles in the synthetic resin layer uniformly. (1) sinking the phosphor particles in the synthetic resin layer by heating and pressing, after spraying the phosphor particles. (2) blowing the phosphor particles to the synthetic resin layer with heated air. As a result, the phosphor particles are uniformly fixed in the synthetic resin layer having uniform thickness.

FIG.1

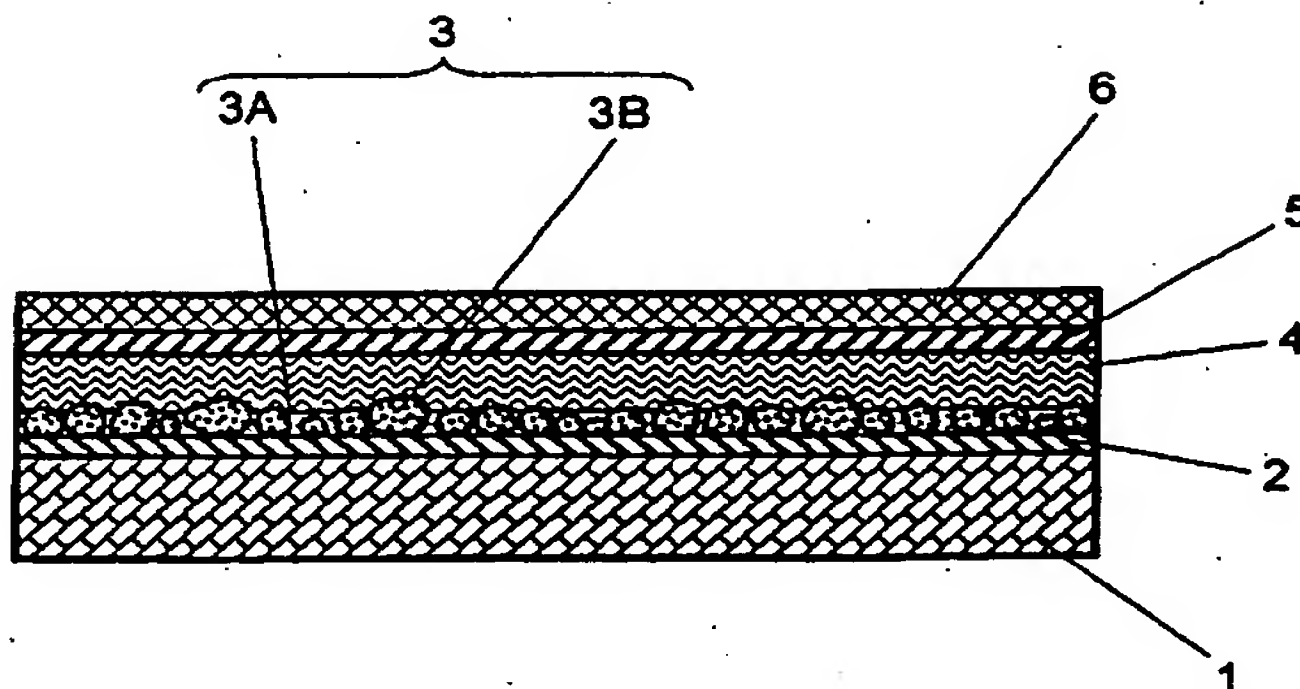

Description

Field of the Invention

[0001] Recently, multifunction and diversification of an electronic apparatus (particularly a portable terminal device, e.g., a cellular phone) have progressed, so that electroluminescent lamp (EL lamp) is used for illuminating a display area or an operating section of the apparatus.

Background of the Invention

[0002] A conventional electroluminescent lamp (EL lamp) will be described with reference to Fig. 6.

Fig. 6 shows a sectional view of the conventional EL lamp. As shown in Fig. 6, light-transmitting electrode-layer 52, e.g., indium tin oxide, is formed on a whole surface of transparent substrate 51, e.g., a glass or a film, using a sputtering method or an electron beam method.

[0003] The conventional EL lamp is formed by the following elements:

- (a) luminescent layer 53 formed of the synthetic resin layer 53A in which phosphor particles 53B, e.g., zinc sulfide, (base material of luminescence) disperse, and formed on transparent substrate 51,
- (b) dielectric layer 54 made of synthetic resin, where barium titanate disperses, and formed on luminescent layer 53,
- (c) back electrode-layer 55 made of silver or carbon resin, and formed on dielectric layer 54, and
- (d) insulating layer 56 made of epoxy resin or polyester resin and formed on back electrode-layer 55.

[0004] The EL lamp mentioned above is installed in an electronic apparatus, and an AC voltage is applied between light-transmitting electrode-layer 52 and back electrode-layer 55. As a result, phosphor particle 53B of luminescent layer 53 emits light, and the light illuminates a display area or an operating section of the electronic apparatus from behind.

[0005] Luminescent layer 53 is formed by the following method. First, paste is made of cyano resin or fluororubber dissolved in organic solvent. Second, phosphor particles 53B disperse in the paste. Third, the paste is formed by a reverse-roll coater or a die coater, or printed by a screen printing. Finally, the paste is dried and formed. By the coating method using the reverse-roll coater or the die coater, phosphor particles 53B can be dispersed in luminescent layer 53 uniformly to a certain extent by changing composition of phosphor particles 53B in the paste or thickness of the coating paste. By this coating method, the luminescent layer can coat on the whole surface of a rectangular substrate, however, can not coat the surface in a specific pattern.

[0006] When the specific pattern is required, the

screen printing is usually used for forming luminescent layer 53. A screen mask used for the screen printing is made of sheet which is formed by knitting stainless threads or polyester threads of diameter approximately 30 μm . The sheet is formed of opening-sections into which paste penetrates and closed-sections into which paste does not penetrate, so that a pattern of an electrode can be printed. As shown in Fig. 6, because the sheet is formed by knitting threads, area 53C under the threads or under intersections of the threads printed with phosphor particles 53B insufficiently or not printed tends to occur.

[0007] A mean diameter of phosphor particles 53B is approximately 20 μm through 25 μm . As shown in Fig. 6, when phosphor particles 53B are printed using a screen mask of thickness 60 μm , two or three of phosphor particles 53B tends to pile up at an area 53D under the opening-section.

[0008] In the conventional EL lamp discussed above, phosphor particles 53B are difficult to disperse in luminescent layer 53 uniformly, so that an area on which phosphor particles 53B do not disperse or pile up tends to occur. As a result, light emission from phosphor particles 53B tends to produce uneven brightness.

[0009] When luminescent layer 53 is formed of paste, which is made of synthetic resin dissolved in organic solvent, and phosphor particles 53B disperse in the resin, a state of dispersing phosphor particles 53B tends to disperse unevenly even in the same printing condition. Because characteristics of printing is changed by diameters or shapes of phosphor particles 53B, or changed by a surface shape of light-transmitting electrode-layer 52.

Summary of the Invention

[0010] The present invention addresses the problem discussed above, and aims to provide an electroluminescent lamp (EL lamp), of which brightness uniformity is improved, and provide a method for manufacturing the EL lamp.

[0011] The EL lamp of this invention includes the following elements:

- (a) a transparent substrate,
- (b) a light-transmitting electrode-layer formed on the transparent substrate,
- (c) an adhesive synthetic resin layer formed on the light-transmitting electrode-layer,
- (d) a luminescent layer which is formed of the synthetic resin layer with phosphor particles dispersed uniformly,
- (e) a dielectric layer formed on the luminescent layer,
- (f) a back electrode-layer formed on the dielectric layer.

Each phosphor particle disperses on the synthetic resin

layer uniformly, and the luminescent layer is thus formed, so that the EL lamp having improved brightness uniformity is obtainable. Because a voltage is applied to the luminescent layer uniformly, an inexpensive and uniform EL lamp with high brightness using less phosphor particles is obtainable.

[0012] The method for manufacturing the EL lamp includes the following steps:

- (a) forming a light-transmitting electrode-layer on a transparent substrate,
- (b) forming an adhesive synthetic resin layer on the light-transmitting electrode-layer,
- (c) sticking phosphor particles on the synthetic resin layer uniformly so that a luminescent layer is formed,
- (d) forming a dielectric layer on the luminescent layer, and
- (e) forming a back electrode-layer on the dielectric layer.

As a result, an inexpensive and uniform EL lamp having improved brightness can be produced.

Brief Description of the Drawings

[0013]

Fig. 1 shows a sectional view of an essential part of an electroluminescent lamp (EL lamp) in accordance with a first exemplary embodiment of the present invention.

Fig. 2A shows an outward appearance of an EL lamp in accordance with a second exemplary embodiment of the present invention.

Fig. 2B shows a sectional view of an essential part of the EL lamp in accordance with the second embodiment of the present invention.

Figs. 3A through 3D show sectional views illustrating a method for manufacturing an EL lamp in accordance with a third exemplary embodiment of the present invention.

Fig. 4 shows a sectional view of an essential part of a phosphor-particle-dispersing apparatus in accordance with the third exemplary embodiment of the present invention.

Fig. 5 shows a scanning electron microscope (SEM) photograph of a surface of a luminescent layer included in the EL lamp in accordance with the first embodiment through the third embodiment of the present invention.

Fig. 6 shows a sectional view of an essential part of a conventional EL lamp.

Description of the Preferred Embodiments

[0014] Exemplary embodiments of the present invention are demonstrated hereinafter with reference to Fig.

1 through Fig. 4.

First Embodiment

[0015] Fig. 1 shows a sectional view of an essential part of an electroluminescent lamp (EL lamp) in accordance with the first exemplary embodiment of the present invention.

[0016] As shown in Fig. 1, the EL lamp is formed by the following elements:

- (a) transparent substrate 1 made of glass, resin film, synthetic resin and the like,
- (b) light-transmitting electrode-layer 2 formed on transparent substrate 1,
- (c) luminescent layer 3 formed of adhesive synthetic resin layer 3A where phosphor particles 3B, e.g., zinc sulfide, disperse uniformly, and formed on light-transmitting electrode-layer 2,
- (d) dielectric layer 4 made of synthetic resin, where barium titanate and so on disperses, and formed on luminescent layer 3,
- (e) back electrode-layer 5 made of silver or carbon resin and formed on dielectric layer 4, and
- (f) insulating layer 6 made of epoxy resin or polyester resin and formed on back electrode-layer 5.

[0017] Light-transmitting electrode-layer 2 is formed by one of the following methods. One method is depositing indium tin oxide by using a sputtering method or an electron beam method, and another method is printing transparent synthetic resin where indium tin oxide disperses.

[0018] The EL lamp is installed in an electronic apparatus, and an AC voltage is applied between light-transmitting electrode-layer 2 and back electrode-layer 5 from a circuit of the electronic apparatus (not shown). As a result, phosphor particles 3B of luminescent layer 3 emit light, and the light illuminates a display area or an operating section of the electronic apparatus from behind.

[0019] In this embodiment, luminescent layer 3 is formed by uniformly dispersing phosphor particles 3B on synthetic resin layer 3A, so that the EL lamp having improved brightness uniformity is obtainable. As a result, because a voltage is applied to luminescent layer 3 uniformly, an inexpensive EL lamp with high brightness using less phosphor particles 3B is obtainable.

[0020] Luminescent layer 3 is formed as follows. Phosphor particles 3B disperse on a surface of synthetic resin layer 3A, then layer 3A is heated and pressed, so that phosphor particles 3B sink in layer 3A.

[0021] Synthetic resin not adhesive at a room temperature can be used as synthetic resin layer 3A, so that transparent substrates 1 having layer 3A can be stacked for a storage purpose. This storage allows the manufacturing of the EL lamp to be flexible.

[0022] A diameter of phosphor particles 3B can be

greater than a thickness of synthetic resin layer 3A. In such a case, when transparent substrates 1 having layer 3A are stacked for a storage purpose, non-adhesive phosphor particles 3B come in contact with transparent substrates 1, so that transparent substrates 1 is easy to be stored.

[0023] Cyano resin, fluororubber, polyester resin or phenoxy resin can be used as a principal ingredient of synthetic resin layer 3A, whereby a dielectric constant of synthetic resin layer 3A becomes large, and brightness of an EL lamp thus becomes high.

[0024] In general, lifetime of luminescence becomes longer as a diameter of phosphor particle 3B becomes larger. In this invention, a diameter of 25 μm through 90 μm of phosphor particle 3B is applicable, so that lifetime of the EL lamp of this invention becomes longer than that of a conventional EL lamp having a phosphor particle of which diameter is 20 μm through 25 μm .

[0025] When thickness of synthetic resin layer 3A is 0.01 μm through 50 μm , and thinner than a diameter of phosphor particle 3B, a brighter EL lamp can be obtained.

Second Embodiment

[0026] Fig. 2A shows an outward appearance of an electroluminescent lamp (EL lamp) in accordance with the second exemplary embodiment of the present invention. Fig. 2B shows a sectional view of an essential part of the same EL lamp.

[0027] As shown in Fig. 2A, for example, the EL lamp included in an electronic apparatus is formed of transparent substrate 11 and a luminescent section.

Transparent substrate 11 made of synthetic resin, e.g., polycarbonate, is molded into a curved-surface substrate, and the luminescent section is formed inside transparent substrate 11.

[0028] The luminescent section is detailed hereinafter with reference to Fig. 2B.

[0029] First, paste is sprayed on an inner surface of transparent substrate 11. The paste is made of epoxy resin (bis-phenol A liquid resin) of 98 wt% and imidazole hardening-agent (2E4MZ manufactured by Shikoku Corporation) of 7 wt% where transparent conductive particles of 400wt% (SP-X manufactured by Sumitomo Metal Industries, Ltd.) disperse. Then, the paste hardens at 80 °C for 3 hours, light-transmitting electrode-layer 2 is thus formed.

[0030] Second, resin solution (isophorone solution where Daieru G502 manufactured by Daikin Industries, Ltd. is dissolved) is sprayed on light-transmitting electrode-layer 2, and then dried up, synthetic resin layer 3A is thus formed.

[0031] Third, phosphor particles 3B are sprayed on a surface of synthetic resin layer 3A at 80 °C using an air-spray gun, luminescent layer 3 is thus formed.

[0032] Then, paste is sprayed on luminescent layer 3, where the paste is made of resin solution (isophorone

solution where Daieru G502 manufactured by Daikin Industries, Ltd. is dissolved) of resin component 40 wt% where barium titanate (BT-01 manufactured by Kanto Kagaku Kabushiki Kaisha) of 60 wt% disperses. Then the paste is dried up, dielectric layer 4 is thus formed.

[0033] The paste of dielectric layer 4 is sprayed approximately 5 μm in thickness at one time, and dried. This process is repeated three times, phosphor particles 3B are thus buried in synthetic resin layer 3A.

[0034] Next, the same paste as light-transmitting electrode-layer 2 is sprayed on dielectric layer 4, and hardens at 80 °C for 3 hours, back electrode-layer 5 is thus formed.

[0035] Finally, transparent polyester resin is sprayed on back electrode-layer 5, insulating layer 6 is thus formed, so that the EL lamp is constructed.

[0036] The EL lamp is installed in the electronic apparatus, and an AC voltage is applied between light-transmitting electrode-layer 2 and back electrode-layer 5 from a circuit of the electronic apparatus (not shown). Then, phosphor particles 3B of luminescent layer 3 emit light, and the light illuminates transparent substrate 11 from inside.

[0037] In this embodiment, respective layers are formed on transparent substrate 11 having a curved-surface, and the EL lamp is formed. As a result, the EL lamp, which can emit light depending on various shapes of display area or an operating section of the electronic apparatus, can be obtained.

Third Embodiment

[0038] Figs. 3A through 3D show sectional views illustrating a method for manufacturing an electroluminescent lamp (EL lamp) in accordance with the third exemplary embodiment of the present invention.

[0039] First, as shown in Fig. 3A, light-transmitting electrode-layer 2 is formed on transparent substrate 1, and synthetic resin layer 3A is printed on light-transmitting electrode-layer 2. Cyano resin, fluororubber, polyester resin or phenoxy resin is used as material of synthetic resin layer 3A. Because a dielectric constant of resin of luminescent layer 3 is required large enough for obtaining high brightness of the EL lamp, cyano resin or fluororubber is desired to have a large dielectric constant.

[0040] The resin discussed above is dissolved in organic solvent, and printed using a screen printing method and dried, then synthetic resin layer 3A is formed. In the manufacturing of the EL lamp, because transparent substrate 1 having synthetic resin layer 3A is piled up for a storage purpose, the synthetic resin having no adhesion is easier to handle than the synthetic resin having adhesion. If fluororubber, e.g., Daieru G502 manufactured by Daikin Industries, Ltd., having adhesion at a room temperature is used, inorganic particles or solid resin particles, of which diameters or composition are determined based on a glass transition point or a coef-

ficient of elasticity, are dispersed in the fluororubber. As a result, synthetic resin layer 3A, which does not have adhesion at a room temperature but gains adhesion by heating, is obtainable.

[0041] Second, as shown in Fig. 3B, phosphor particles 3B disperse on synthetic resin layer 3A.

[0042] Third, as shown in Fig. 3C, synthetic resin layer 3A is heated, then obtains adhesion, so that phosphor particles 3B are fixed uniformly on a surface of synthetic resin layer 3A. Then phosphor particles 3B not fixed on the surface of synthetic resin layer 3A are removed.

[0043] Then phosphor particles 3B are pressed using a rubber roller with synthetic resin layer 3A heated. As a result, phosphor particles 3B disperse uniformly in synthetic resin layer 3A, luminescent layer 3 shown in Fig. 3D is thus formed.

[0044] Finally, dielectric layer 4, back electrode-layer 5 and insulating layer 6 are sequentially stacked on luminescent layer 3, then the EL lamp is formed (not shown).

[0045] In the method of manufacturing the EL lamp of this embodiment, after luminescent layer 3 is formed, phosphor particles 3B sink in synthetic resin layer 3A by heating and pressing layer 3. As a result, because each phosphor particle 3B uniformly disperses in synthetic resin layer 3A, a uniform EL lamp with high brightness is obtainable.

[0046] Process of manufacturing luminescent layer 3 without heating and pressing is described as follows. Dielectric layer 4 is formed by coating and drying paste of a high dielectric constant which is similar to that of synthetic resin layer 3A, where the paste includes organic solvent which dissolves or swells synthetic resin layer 3A. In such a case, phosphor particles 3B can disperse in synthetic resin layer 3A uniformly without heating and pressing layer 3.

[0047] In the process of coating paste of the high dielectric constant, the solvent in dielectric layer 4 dissolves or swells synthetic resin layer 3A, and softens layer 3A. Then phosphor particles 3B sink in synthetic resin layer 3A due to surface tension of dielectric layer 4 in a drying process. As a result, phosphor particles 3B can disperse in synthetic resin layer 3A uniformly.

[0048] When a thickness of synthetic resin layer 3A is not less than 0.01 μm and not more than 50 μm , synthetic resin layer 3A has enough adhesion to stick phosphor particle 3B. The EL lamp having high brightness can be thus manufactured. Cyanoethyl pullulan, e.g., CR-M manufactured by Shin-Etsu Chemical Co., Ltd. or Daieru G201 manufactured by Daikin Industries, Ltd., is used as synthetic resin layer 3A. In such a case, when a thickness of layer 3A is less than 0.01 μm , layer 3A has not enough adhesion, so that phosphor particles 3B occasionally come off, and when a thickness of layer 3A is more than 50 μm , brightness of the EL lamp occasionally decreases. More desirable thickness of synthetic resin layer 3A is 2 μm through 25 μm .

[0049] A phosphor-particle-dispersing apparatus

used for manufacturing the EL lamp in accordance with the third embodiment is described hereinafter with reference to Fig. 4.

[0050] Fig. 4 shows a sectional view of an essential part of the phosphor-particle-dispersing apparatus in accordance with the third exemplary embodiment of the present invention.

[0051] In Fig. 4, the phosphor-particle-dispersing apparatus includes sucking nozzle 16 surrounding blowing nozzle 15. However, sucking nozzle 16 is not necessarily placed surrounding blowing nozzle 15, but it can be placed next to blowing nozzle 15. Transparent substrate 1, on which light-transmitting electrode-layer 2 and adhesive synthetic resin layer 3A are piled up, is disposed under nozzle 15 and nozzle 16.

[0052] Phosphor particles 3B are continuously blown to a surface of synthetic resin layer 3A with heated air at approximately 50 °C through 180°C from blowing nozzle 15. Synthetic resin layer 3A obtains enough adhesion by the heated air, so that blown phosphor particles 3B are fixed on the surface of synthetic resin layer 3A uniformly. However, an area, where phosphor particles 3B are not fixed on a surface of synthetic resin layer 3A, may occur at first. Even in such a case, phosphor particles 3B, which include various sizes of particles, are continuously blown to layer 3A, so that phosphor particles 3B having appropriate sizes are fixed on the area, phosphor particles 3B are thus fixed on a whole surface of synthetic resin layer 3A uniformly.

[0053] When phosphor particles 3B are blown, air is sucked from sucking nozzle 16, so that phosphor particles 3B not fixed on the surface of synthetic resin layer 3A are removed.

[0054] When sucking power of sucking nozzle 16 is greater than blowing power of blowing nozzle 15, dispersion of particles 3B to an undesirable area can be prevented, and particles 3B dispersed by static electricity on an area, where layer 3A is not formed, can be removed.

[0055] Then synthetic resin layer 3A is heated and pressed, luminescent layer 3 having layer 3A, where phosphor particles 3B are dispersed uniformly, is formed. When the paste having a high dielectric constant and including solvent which dissolves or swells synthetic resin layer 3A is used, a heating and a pressing processes are not necessary. In such a case, when dielectric layer 4 is formed on luminescent layer 3, phosphor particles 3B can sink in synthetic resin layer 3A.

[0056] Finally, dielectric layer 4, back electrode-layer 5 and insulating layer 6 are sequentially stacked on luminescent layer 3, the EL lamp is thus formed.

[0057] As shown in Fig. 4, in the phosphor-particle-dispersing apparatus of this invention, phosphor particles 3B continuously disperse on the surface of synthetic resin layer 3A, then phosphor particles 3B not fixed on the surface of synthetic resin layer 3A can be removed by sucking nozzle 16. As a result, the phosphor particles can be uniformly dispersed and filled on the

surface of synthetic resin layer 3A, and dispersion of the phosphor particles to an undesirable area can be prevented.

[0058] Fig.5 shows a scanning electron microscope (SEM) photograph of a surface of a luminescent layer included in the EL lamp in accordance with the first embodiment through the third embodiment of the present invention. As shown in Fig.5, in the EL lamp of this invention, small phosphor particles are filled among large phosphor particles. An area, on which phosphor particles do not disperse or pile up, is not observed in the luminescent layer included in the EL lamp of this invention.

Claims

1. An electroluminescent lamp (EL lamp) comprising:
 - (a) a transparent substrate;
 - (b) a light-transmitting electrode-layer formed on said transparent substrate;
 - (c) an adhesive synthetic resin layer formed on said light-transmitting electrode-layer;
 - (d) a luminescent layer formed of said synthetic resin layer with phosphor particles fixed uniformly;
 - (e) a dielectric layer formed on said luminescent layer; and
 - (f) a back electrode-layer formed on said dielectric layer.
2. The EL lamp of claim 1,

wherein said luminescent layer is formed by spraying the phosphor particles on a surface of said synthetic resin layer, then heating and pressing said synthetic resin layer for sinking the phosphor particles in said synthetic resin layer.
3. The EL lamp of claim 1,

wherein said synthetic resin layer is not adhesive at a room temperature.
4. The EL lamp of claim 1,

wherein a diameter of one of the phosphor particles is greater than a thickness of said synthetic resin layer.
5. The EL lamp of claim 1,

wherein a principal ingredient of said synthetic resin layer is one of cyano resin, fluororubber, polyester resin and phenoxy resin.
6. The EL lamp of claim 1,

wherein a thickness of said synthetic resin layer is not less than 0.01 μm and not more than 50 μm .
7. The EL lamp of claim 1,

wherein a diameter of one of the phosphor particles is not less than 25 μm and not more than 90 μm .
8. The EL lamp of claim 1,

wherein a shape of said transparent substrate is a curved-surface shape.
9. The method for manufacturing an EL lamp comprising the steps of
 - (a) forming a light-transmitting electrode-layer on a transparent substrate;
 - (b) forming an adhesive synthetic resin layer on the light-transmitting electrode-layer;
 - (c) forming a luminescent layer by sticking phosphor particles on the synthetic resin layer uniformly;
 - (d) forming a dielectric layer on the luminescent layer; and
 - (e) forming a back electrode-layer on the dielectric layer.
10. The method for manufacturing the EL lamp of claim 9,

wherein the synthetic resin layer is not adhesive at a room temperature.
11. The method for manufacturing the EL lamp of claim 9,

wherein a diameter of one of the phosphor particles is greater than a thickness of the synthetic resin layer.
12. The method for manufacturing the EL lamp of claim 9,

wherein a thickness of the synthetic resin layer is not less than 0.01 μm and not more than 50 μm .
13. The method for manufacturing the EL lamp of claim 9,

wherein a diameter of one of the phosphor particles is not less than 25 μm and not more than 90 μm .
14. The method for manufacturing the EL lamp of claim 9,

wherein step (c) further comprises:

 - i) spraying the phosphor particles on a surface of the synthetic resin layer; and
 - ii) heating and pressing the synthetic resin layer, thereby sinking the phosphor particles in the synthetic resin layer.
15. The method for manufacturing the EL lamp of claim 9,

wherein in step (d), the dielectric layer is formed on the luminescent layer by coating and drying paste of a high dielectric constant, and solvent which one of dissolves and swells the synthetic resin layer is used as organic solvent included in the paste of a high dielectric constant. 5

16. The method for manufacturing the EL lamp of claim 9,

wherein in step (c), after the phosphor particles are blown to a surface of the synthetic resin layer with heated air, the phosphor particles not fixed on the surface of the synthetic resin layer are removed by a sucking nozzle. 10

15

20

25

30

35

40

45

50

55

FIG.1

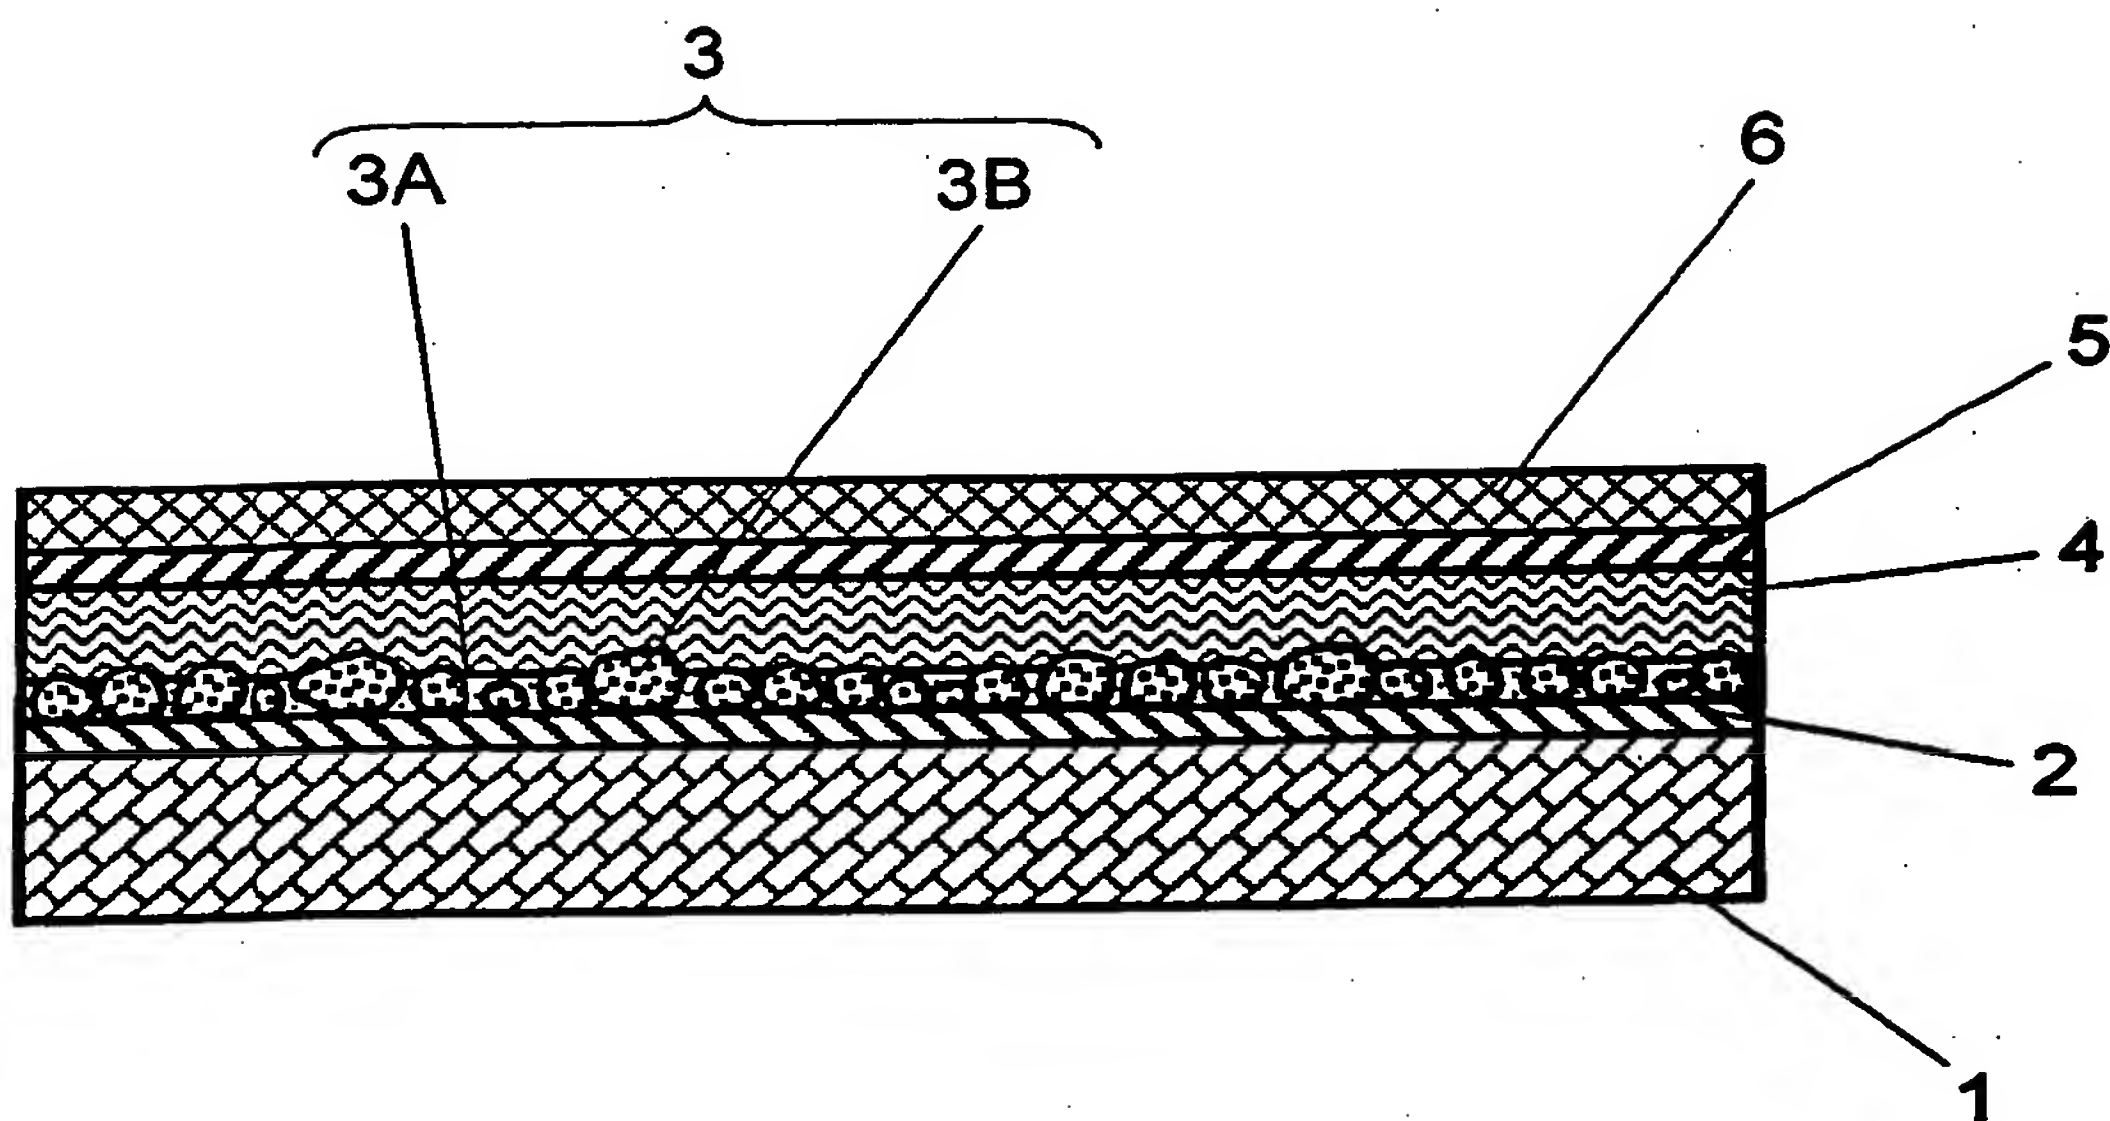


FIG.2A

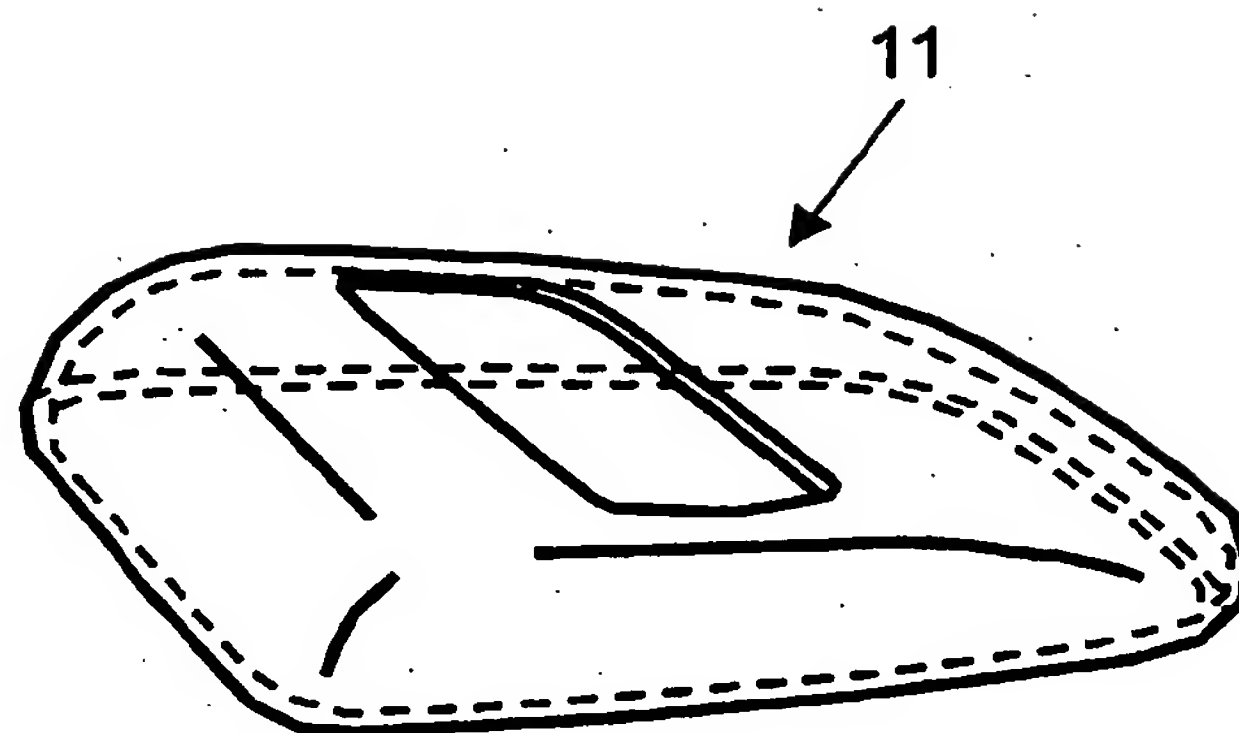


FIG.2B

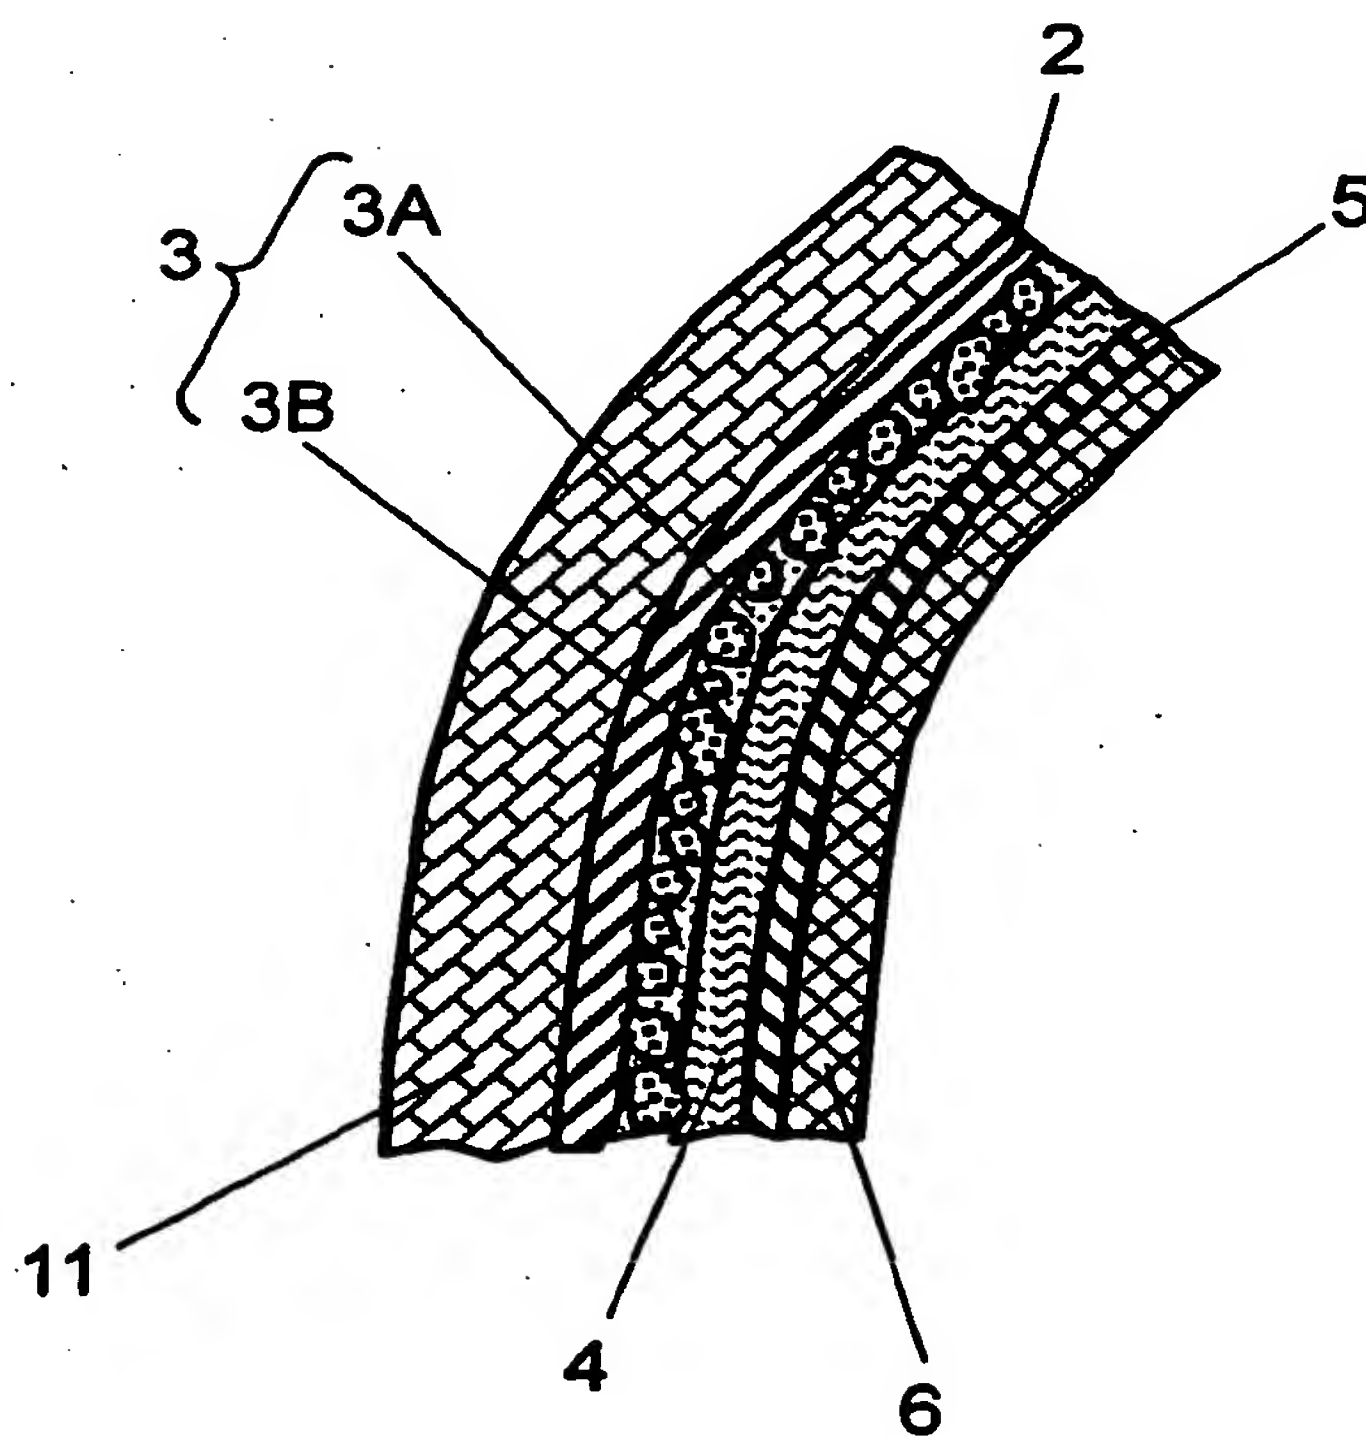


FIG.3A

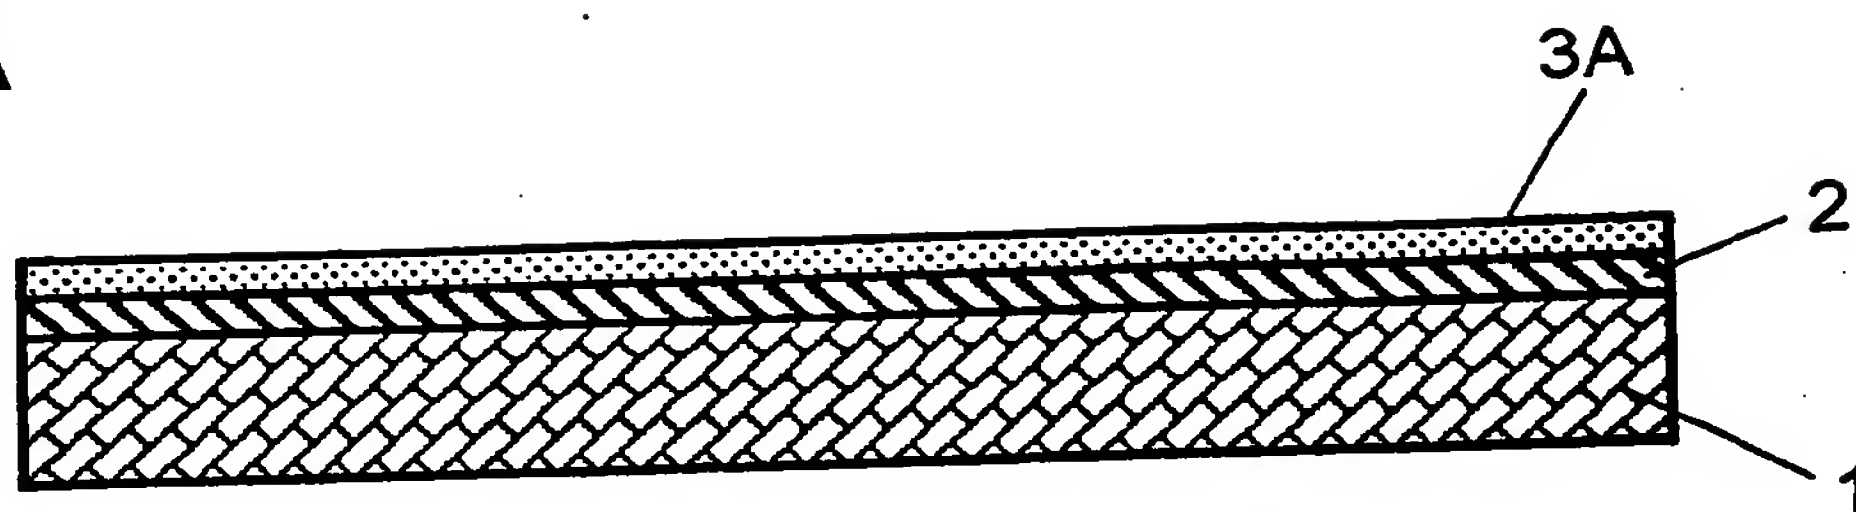


FIG.3B

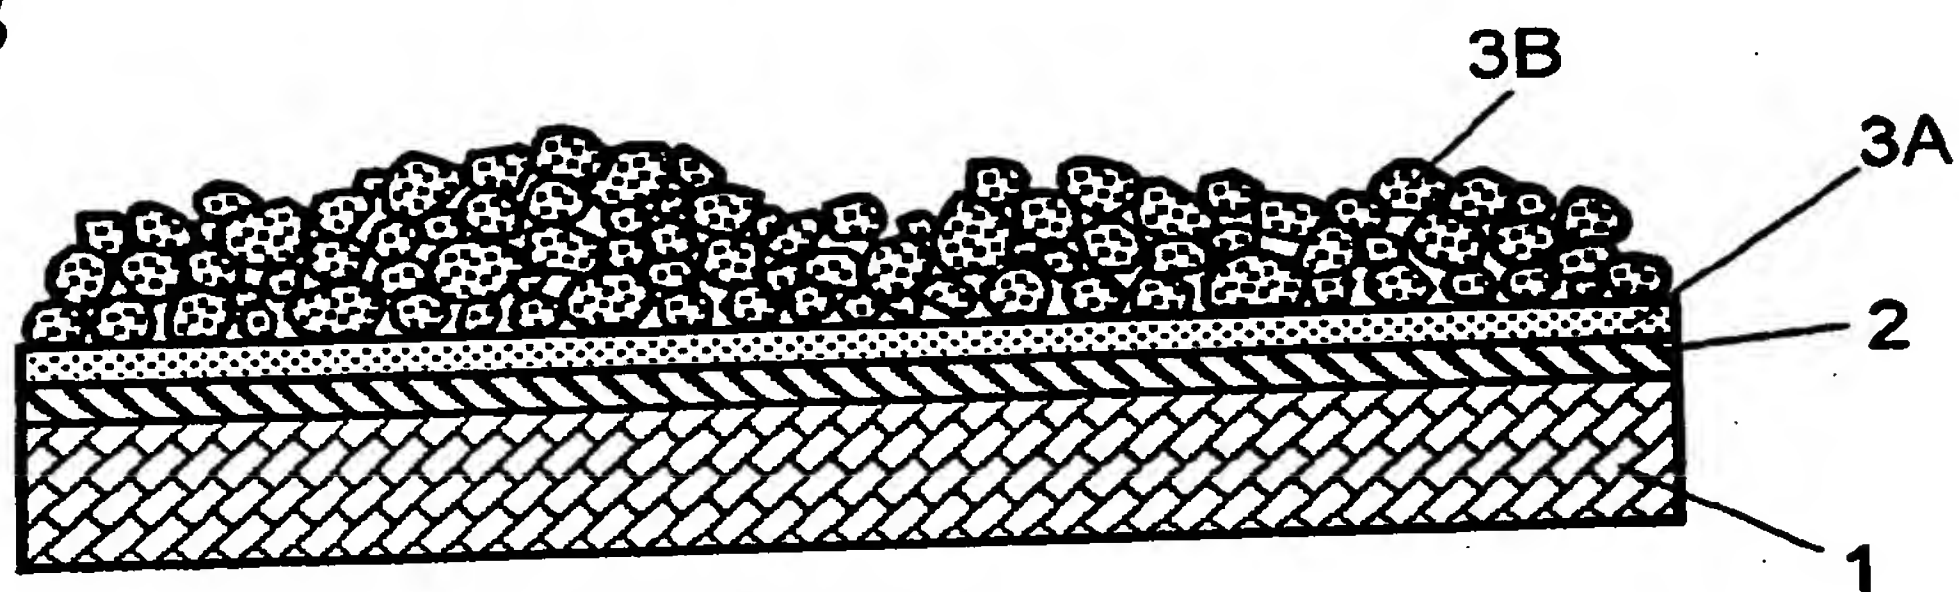


FIG.3C

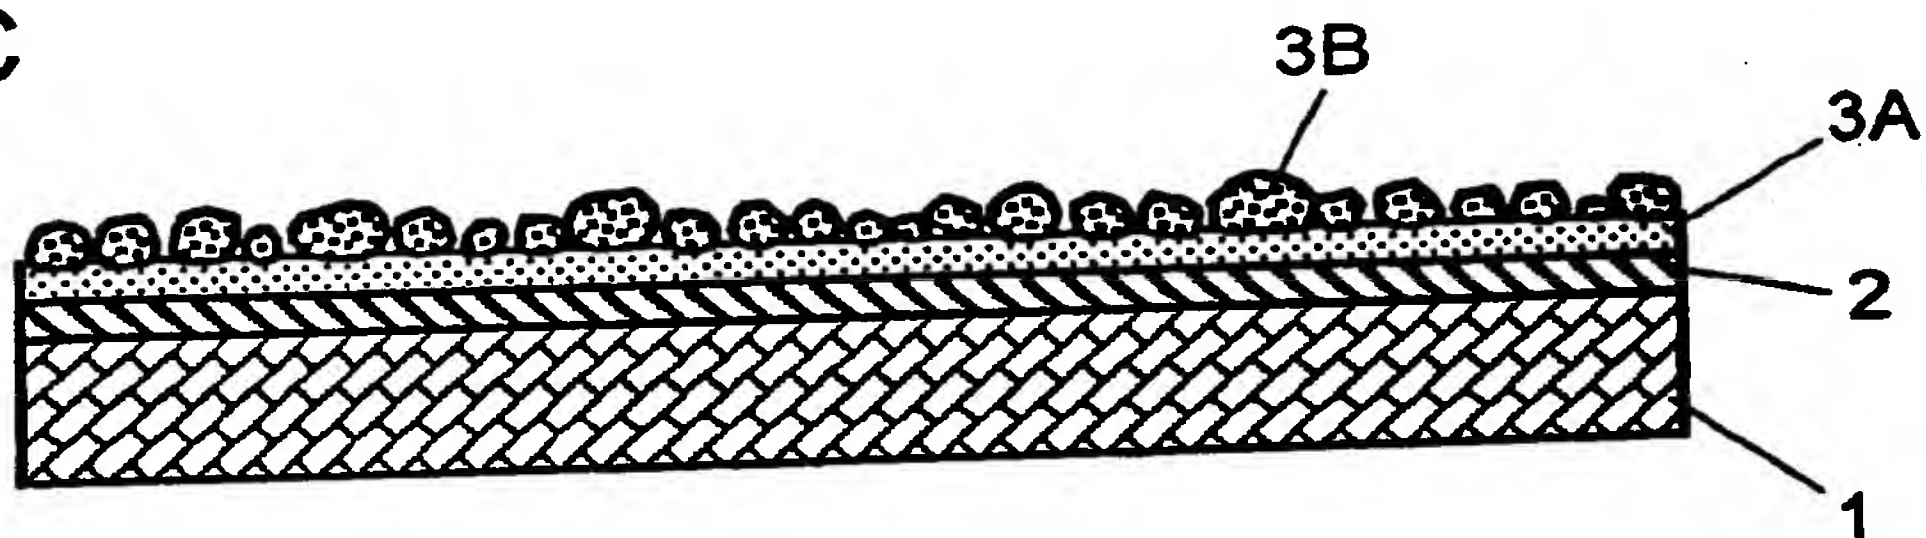


FIG.3D

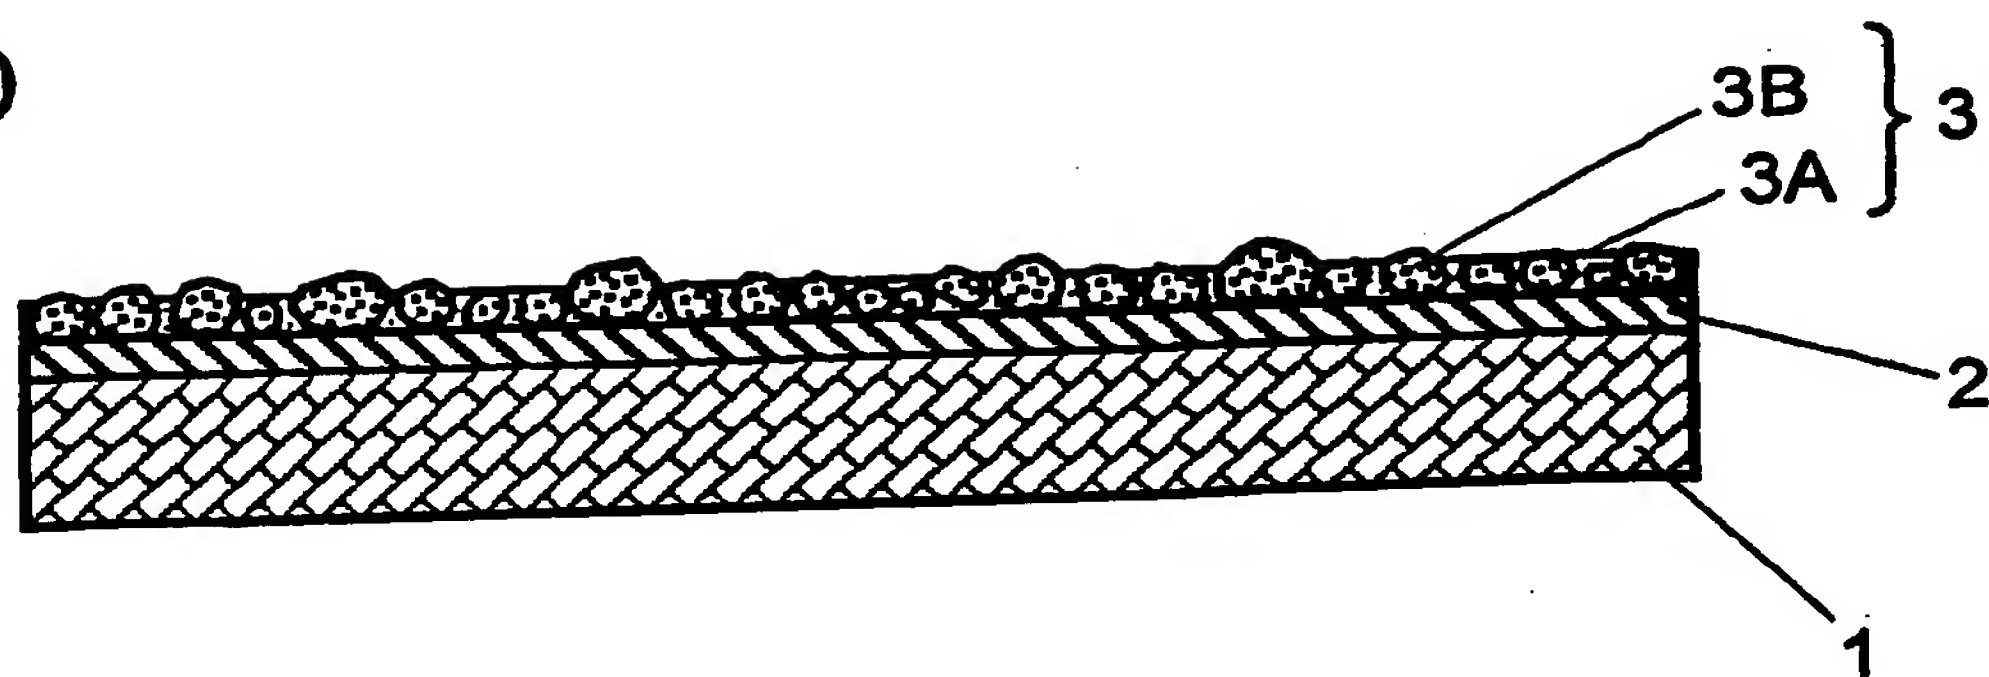


FIG.4


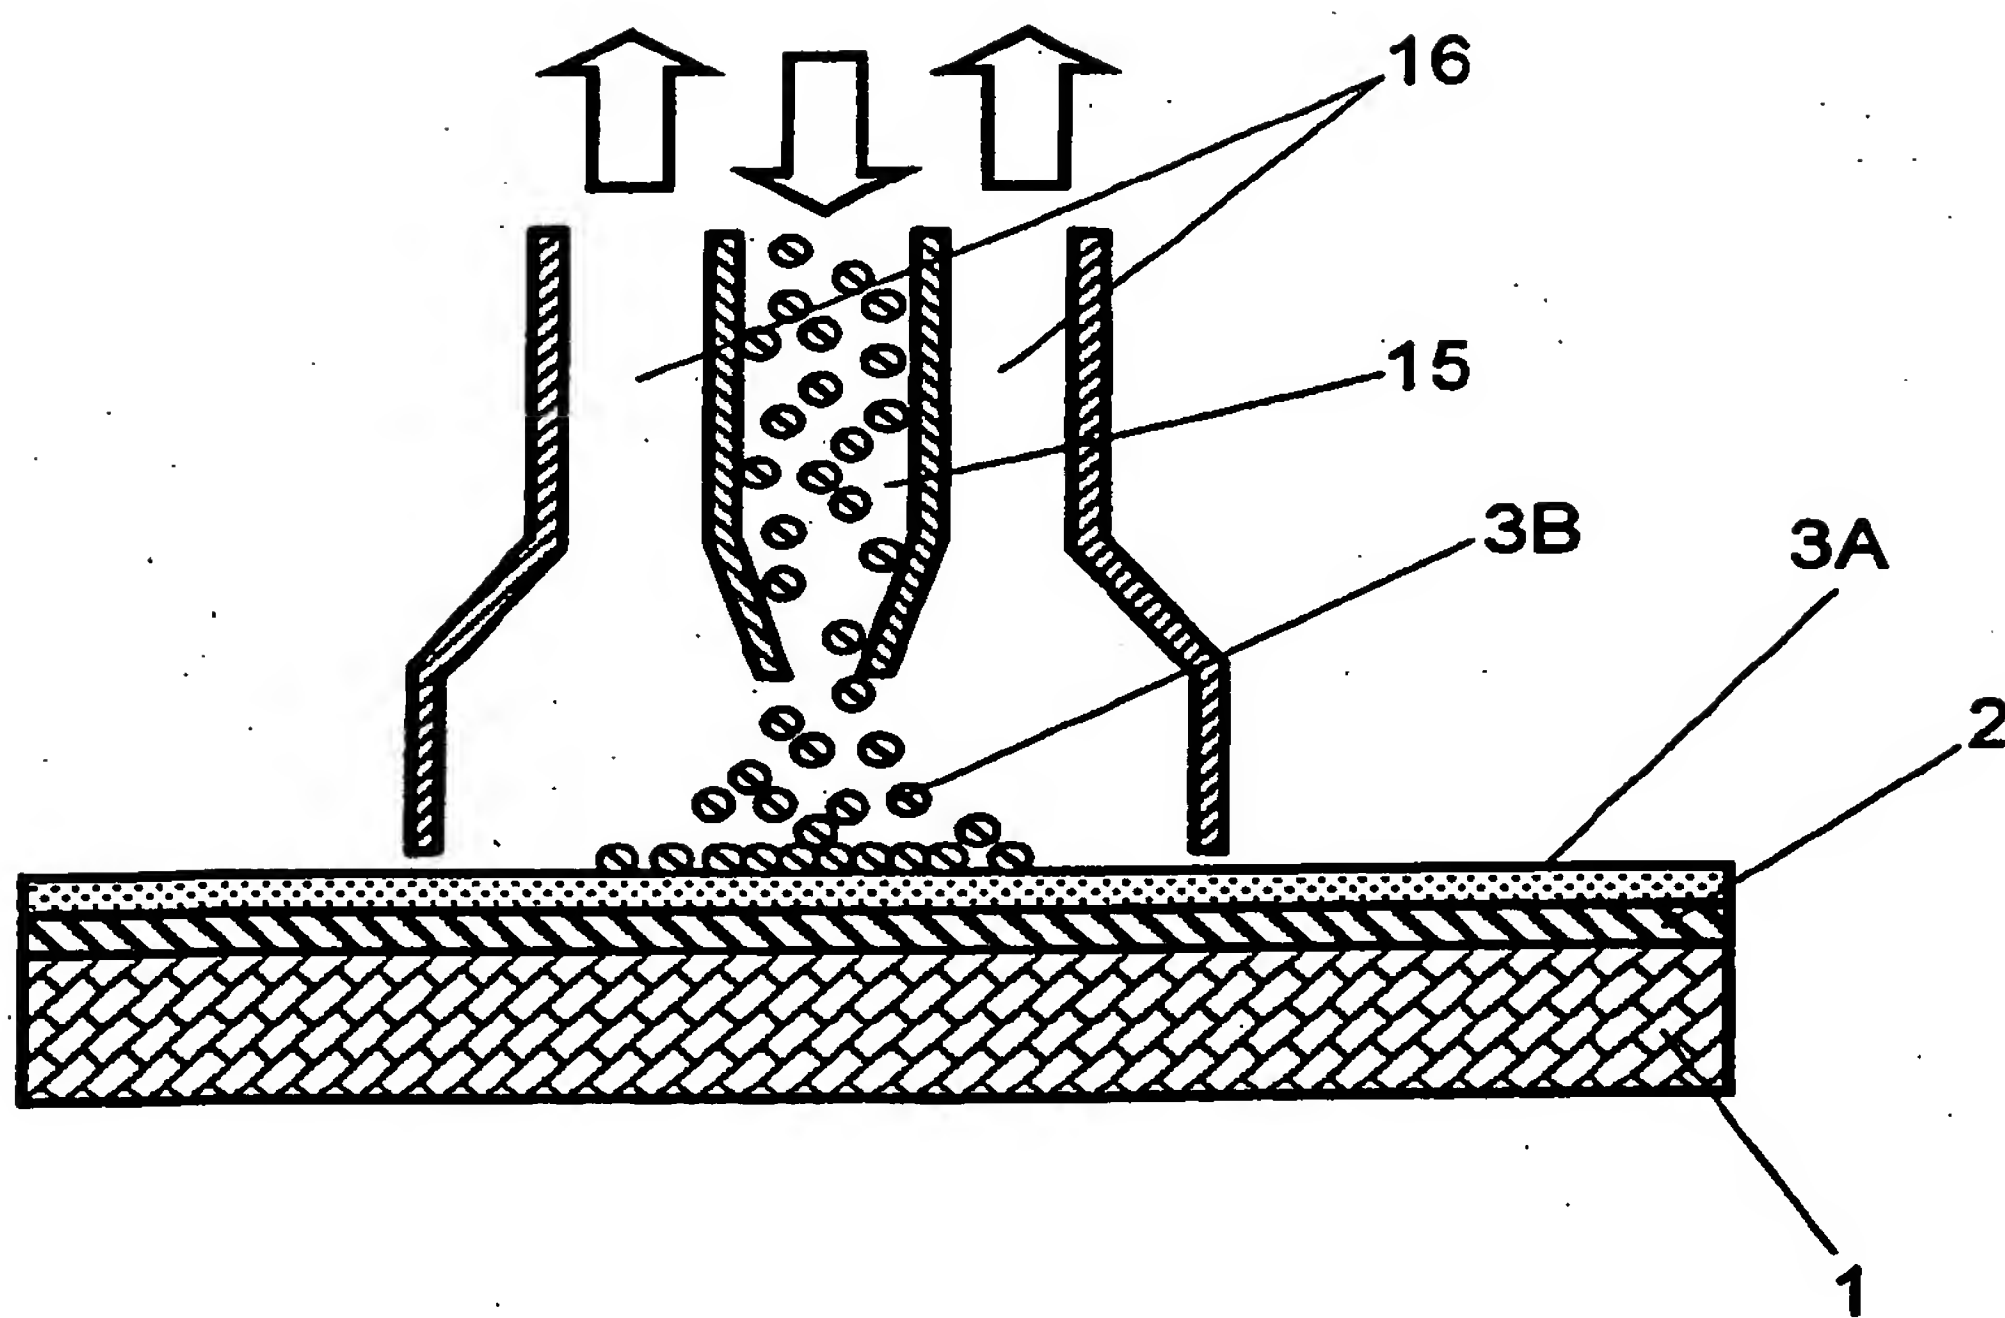



FIG.5

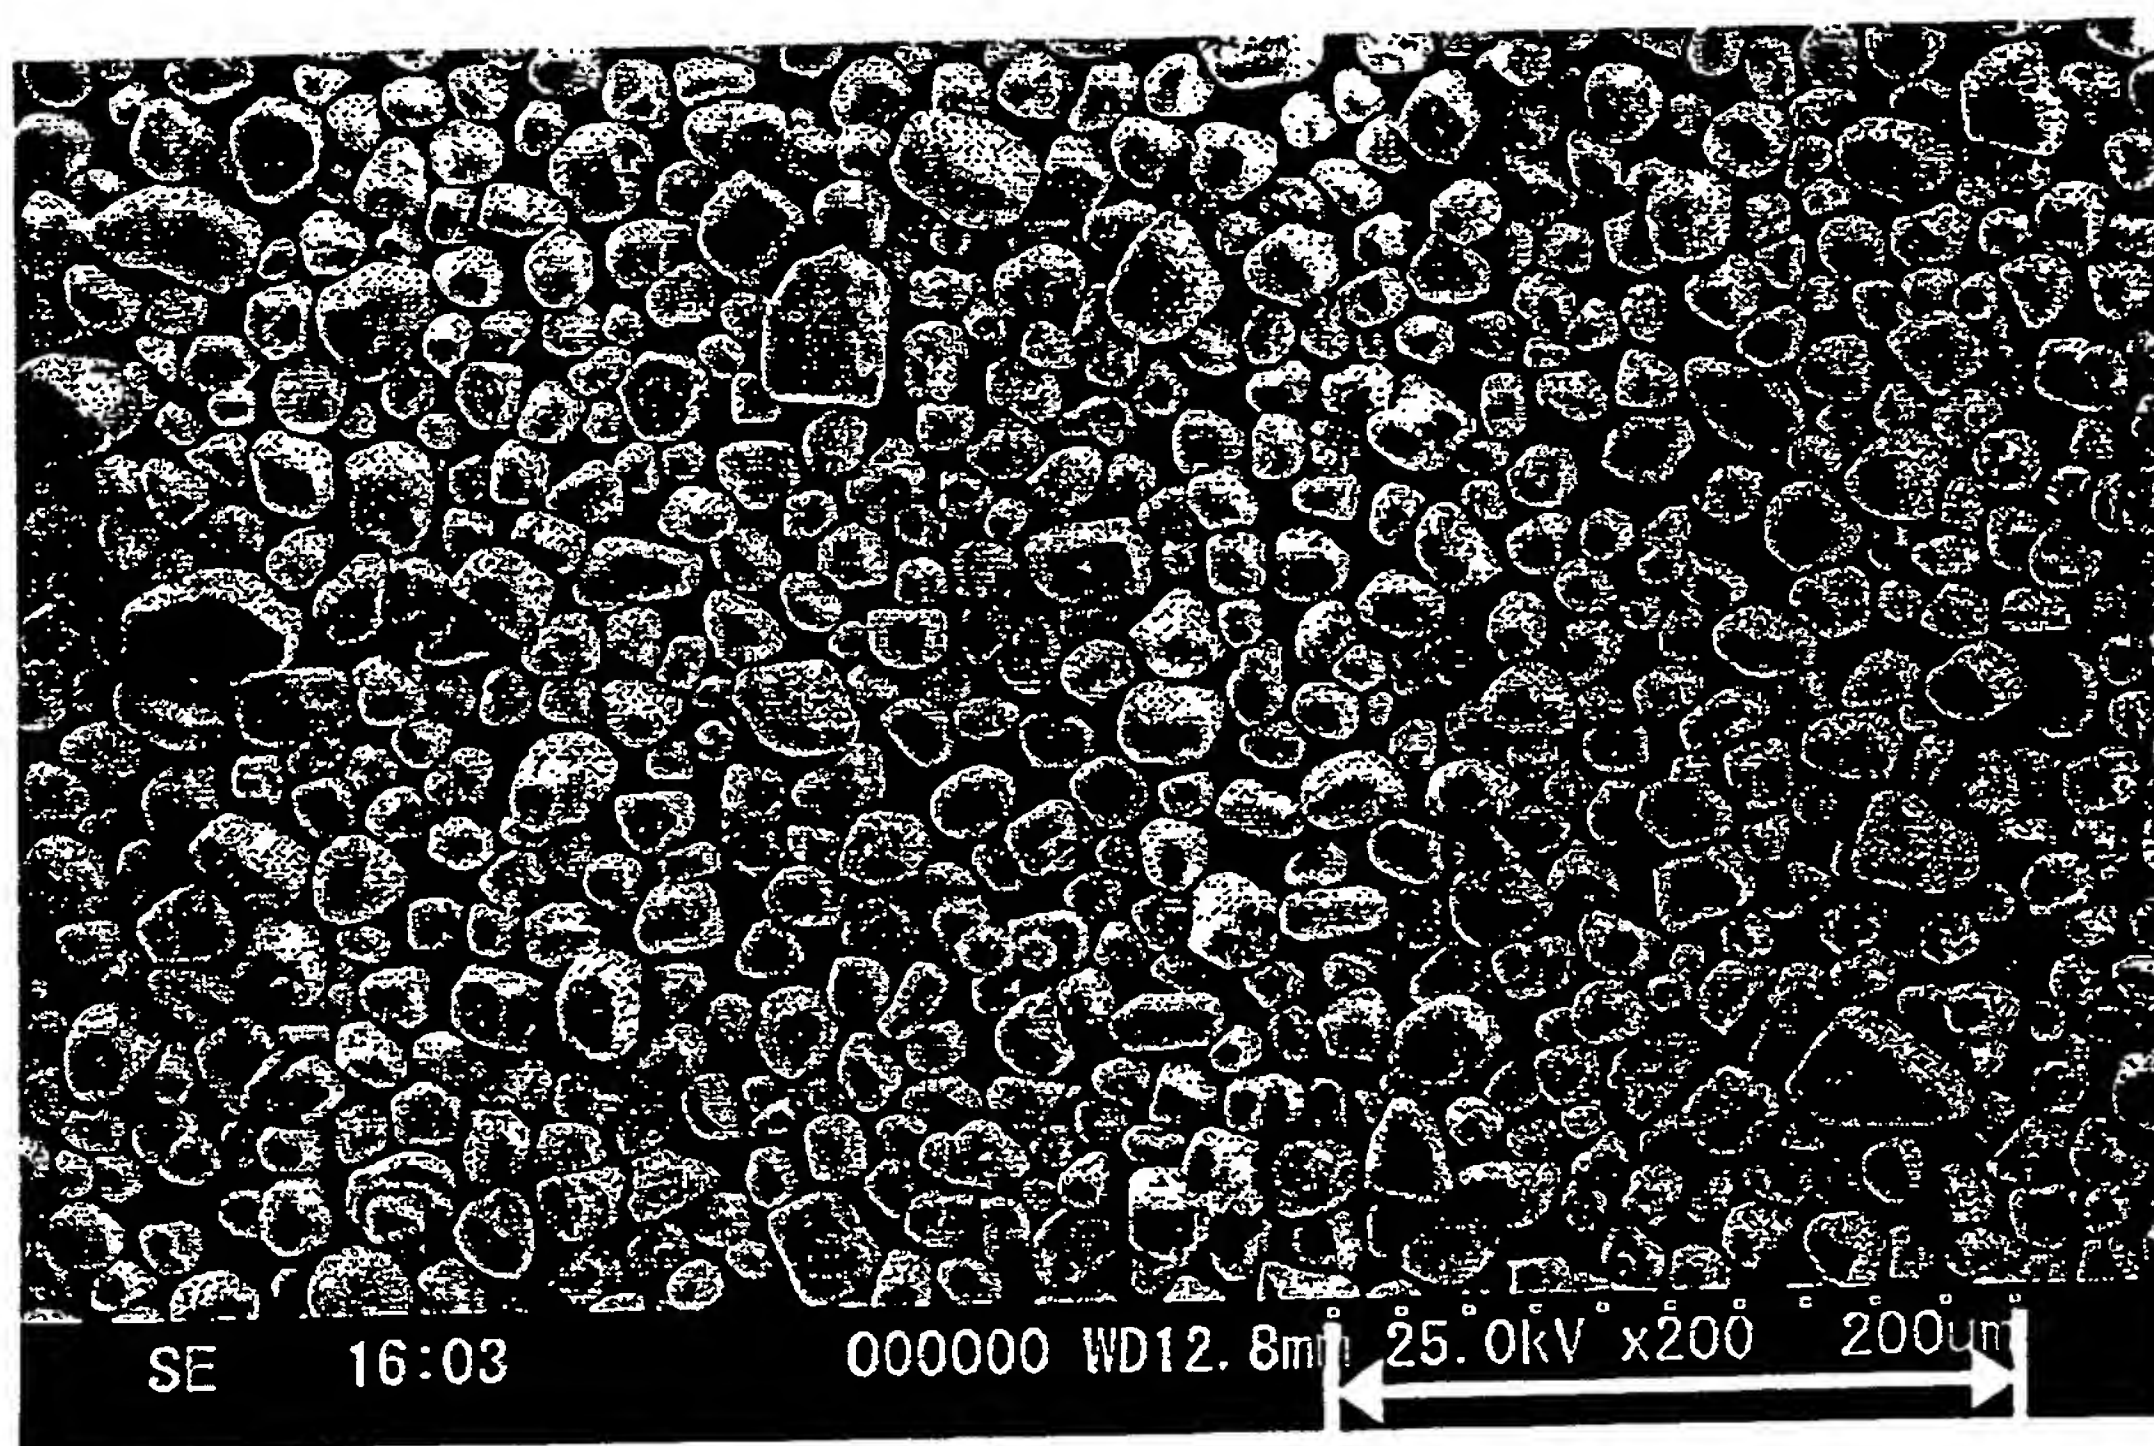

200µm

BEST AVAILABLE COPY

FIG.6 PRIOR ART

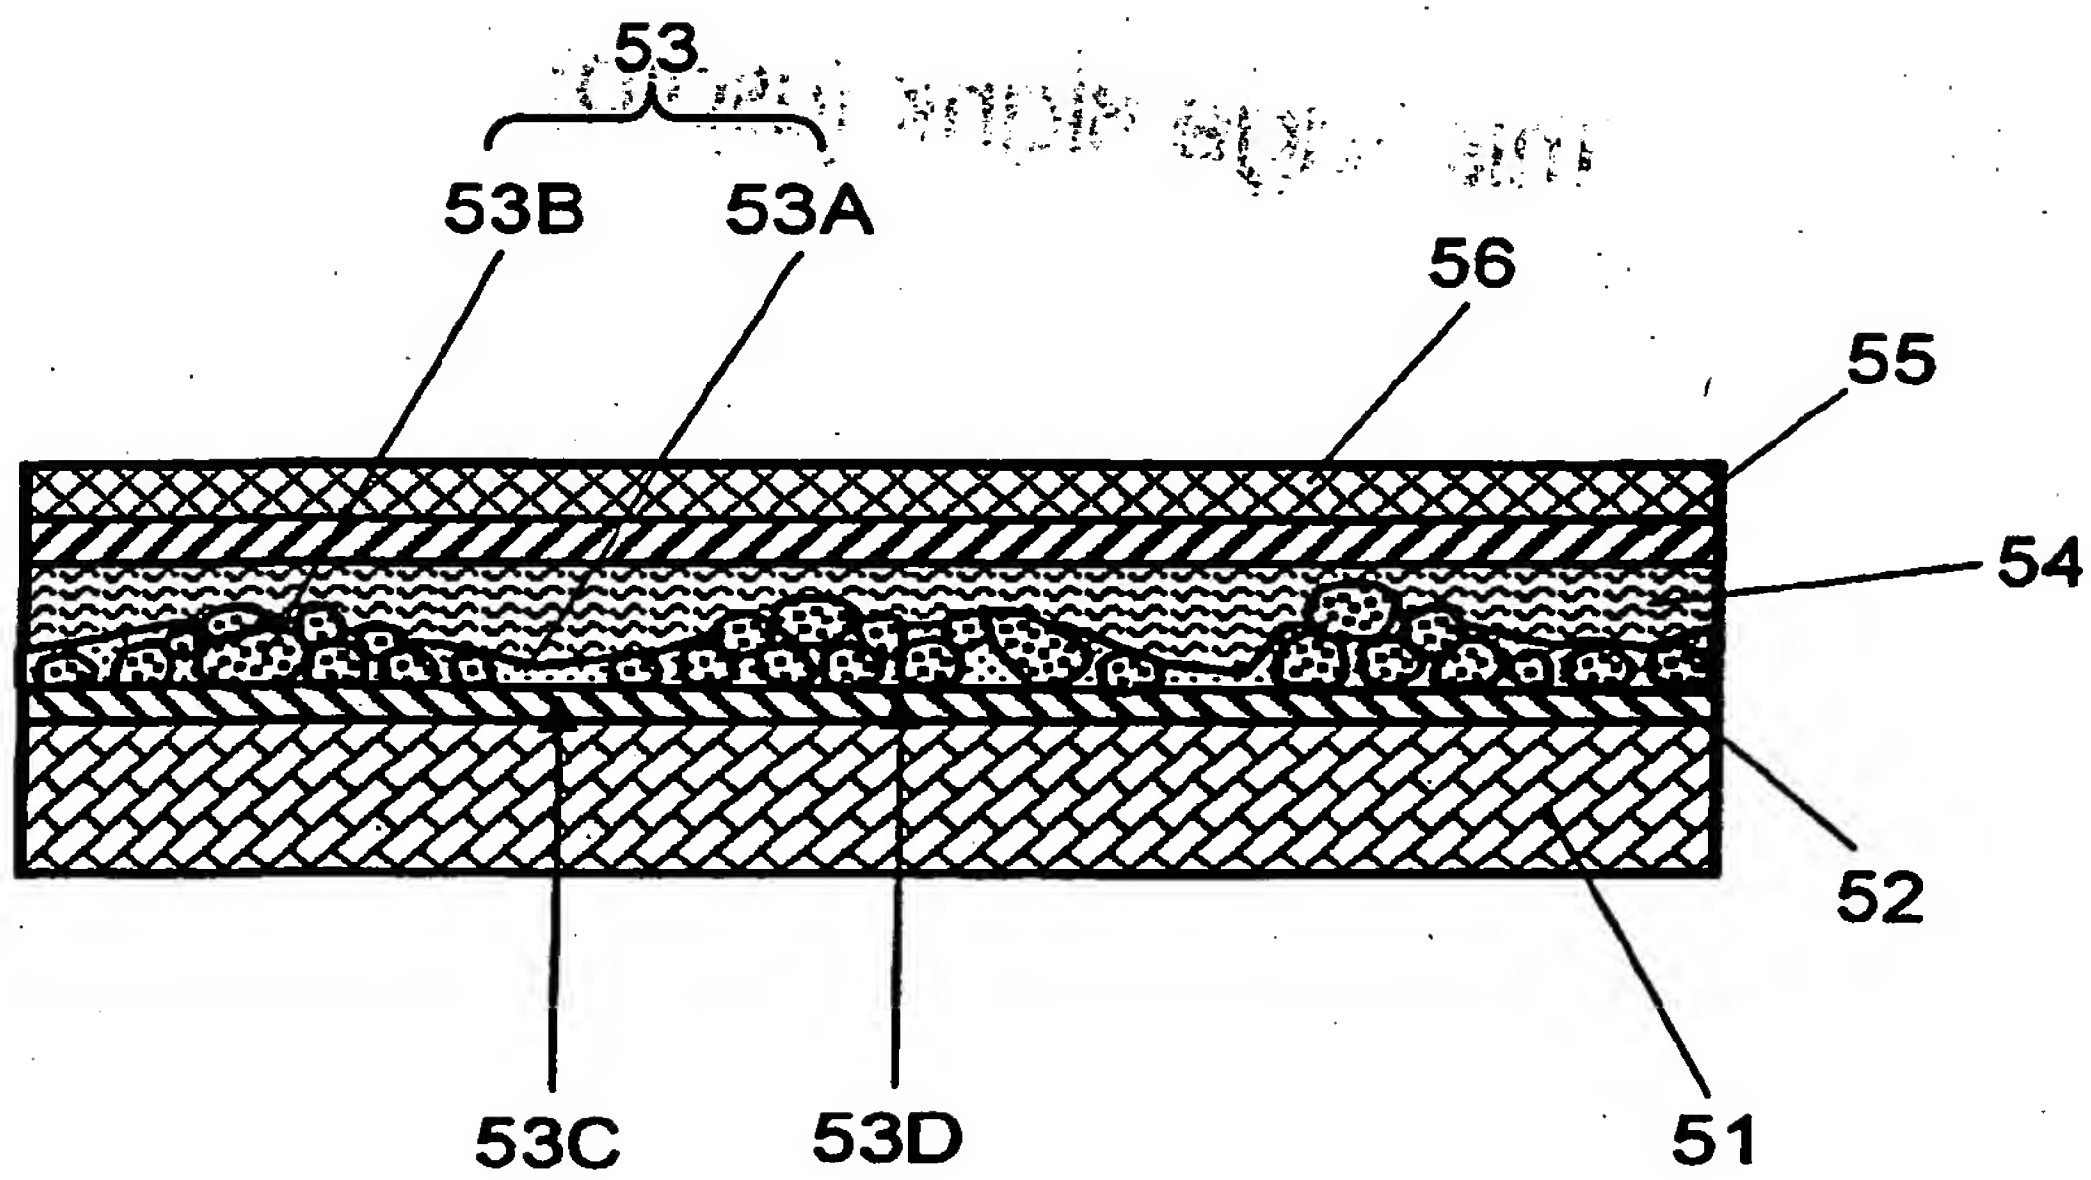

This Page Blank (uspto)

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 244 335 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
14.04.2004 Bulletin 2004/16

(51) Int Cl.7: **H05B 33/14, H05B 33/10**

(43) Date of publication A2:
25.09.2002 Bulletin 2002/39

(21) Application number: **02006003.4**

(22) Date of filing: **15.03.2002**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

- **Kawasumi, Akito**
Neyagawa-shi, Osaka 572-0055 (JP)
- **Okuma, Shinji**
Obama-shi, Fukui 917-0027 (JP)
- **Chikahisa, Yosuke**
Akashi-shi, Hyogo 674-0068 (JP)
- **Nishioka, Naohiro**
Hirakata-shi, Osaka 573-0081 (JP)

(30) Priority: **19.03.2001 JP 2001077863**
01.10.2001 JP 2001305035
05.12.2001 JP 2001371250

(74) Representative: **Grünecker, Kinkeldey,**
Stockmair & Schwanhäusser Anwaltssozietät
Maximilianstrasse 58
80538 München (DE)


(71) Applicant: **MATSUSHITA ELECTRIC INDUSTRIAL**
CO., LTD.
Kadoma-shi, Osaka 571-8501 (JP)

(72) Inventors:
• **Tanabe, Koji**
Katano-shi, Osaka 576-0051 (JP)

(54) **Electroluminescent lamp and method for manufacturing the same**

(57) An electroluminescent lamp (EL lamp) is formed by stacking a light-transmitting electrode-layer (2), an adhesive synthetic resin layer, a luminescent layer (3) formed of the synthetic resin layer (3A) with phosphor particles (3B) fixed uniformly, a dielectric layer (4) and a back electrode-layer (5) on a transparent substrate (1) sequentially. By this structure, a uniform EL lamp having improved brightness can be produced. A method for manufacturing the EL lamp includes following steps for fixing the phosphor particles (3B) in the synthetic resin layer uniformly (3A). (1) sinking the phosphor particles (3B) in the synthetic resin layer (3A) by heating and pressing, after spraying the phosphor particles (3B). (2) blowing the phosphor particles (3B) to the synthetic resin layer (3A) with heated air. As a result, the phosphor particles (3B) are uniformly fixed in the synthetic resin layer (3A) having uniform thickness.

FIG.1

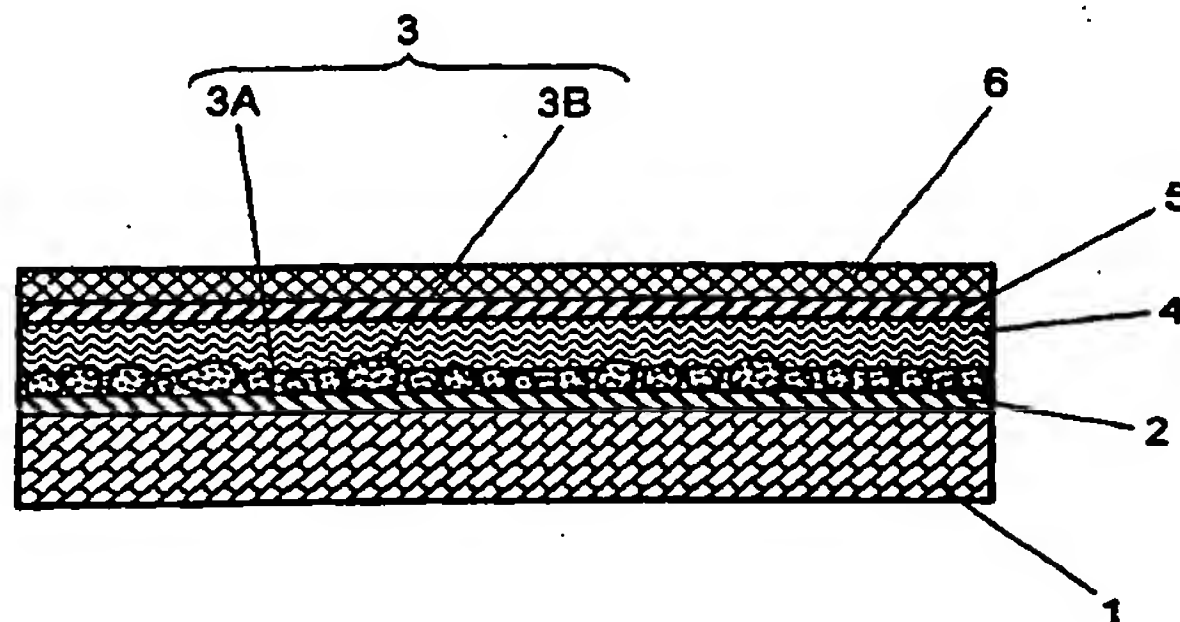



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 00 6003

| DOCUMENTS CONSIDERED TO BE RELEVANT | | | |
|--|--|--|--|
| Category | Citation of document with indication, where appropriate, of relevant passages | Relevant to claim | CLASSIFICATION OF THE APPLICATION (Int.Cl.7) |
| X | WO 00/42825 A (ABE HIDETOSHI ; ARAKI YOSHINORI (JP); KOBAYASHI MITSUAKI (JP); MATSUMO) 20 July 2000 (2000-07-20) * the whole document * | 1,4-7,9, 11-13 | H05B33/14 H05B33/10 |
| X | EP 0 323 218 A (LOCTITE LUMINESCENT SYST) 5 July 1989 (1989-07-05) * the whole document * | 1,2,4,9, 11 | |
| X | PATENT ABSTRACTS OF JAPAN vol. 0162, no. 15 (E-1204), 20 May 1992 (1992-05-20) & JP 4 036993 A (NIPPON SEIKI CO LTD), 6 February 1992 (1992-02-06) * abstract * | 1,5 | |
| P,X | PATENT ABSTRACTS OF JAPAN vol. 2002, no. 02, 2 April 2002 (2002-04-02) & JP 2001 284053 A (THREE M INNOVATIVE PROPERTIES CO), 12 October 2001 (2001-10-12) * abstract * | 1 | |
| A | WO 88/04467 A (APPELBERG GUSTAF T) 16 June 1988 (1988-06-16) * the whole document * | 1-16 | |
| A | PATENT ABSTRACTS OF JAPAN vol. 1996, no. 10, 31 October 1996 (1996-10-31) & JP 8 148278 A (HIRATE TAKASHI; MATSUSHITA ELECTRON CORP), 7 June 1996 (1996-06-07) * abstract * | 1 | |
| The present search report has been drawn up for all claims | | | |
| Place of search The Hague | | Date of completion of the search 12 February 2004 | Examiner Drouot, M-C |
| <p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p> | | | |

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 00 6003

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-02-2004

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|---|---------------------|----------------------------|---------------------|
| WO 0042825 A | 20-07-2000 | JP 2000208275 A | 28-07-2000 |
| | | AU 2487900 A | 01-08-2000 |
| | | BR 0007536 A | 02-10-2001 |
| | | CA 2356999 A1 | 20-07-2000 |
| | | CN 1337141 T | 20-02-2002 |
| | | DE 60007276 D1 | 29-01-2004 |
| | | EP 1147688 A1 | 24-10-2001 |
| | | WO 0042825 A1 | 20-07-2000 |
| | | US 6613455 B1 | 02-09-2003 |
| EP 0323218 A | 05-07-1989 | US 4902567 A | 20-02-1990 |
| | | CA 1311517 C | 15-12-1992 |
| | | EP 0323218 A1 | 05-07-1989 |
| | | JP 1302692 A | 06-12-1989 |
| JP 4036993 A | 06-02-1992 | NONE | |
| JP 2001284053 A | 12-10-2001 | NONE | |
| WO 8804467 A | 16-06-1988 | AU 598629 B2 | 28-06-1990 |
| | | AU 1085088 A | 30-06-1988 |
| | | EP 0301039 A1 | 01-02-1989 |
| | | WO 8804467 A1 | 16-06-1988 |
| | | US 5019748 A | 28-05-1991 |
| JP 8148278 A | 07-06-1996 | NONE | |

This Page Blank (uspto)